



# Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685  
 Phone 800/CALL TSM (800/225-5876) or 310/515-4801  
 online www.grabbar.com • Fax 310/217-0653


# CC-C

## Technical Data


Revised Oct. 2001

Page 1 of 2

# Clip Lock Column Guard

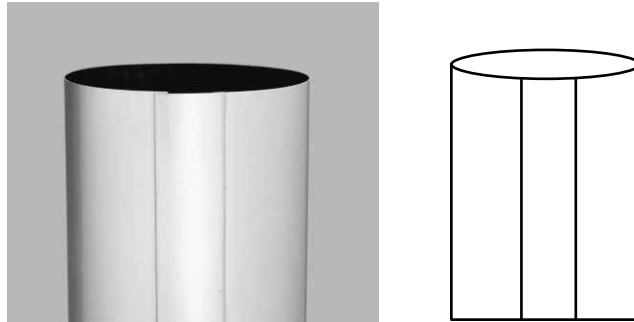

Shown in Satin Finish St. St.



## Model Numbers

### CC-C Series Clip Lock Column Guard, 60" Long

	SATIN FINISH ST. ST.	BRIGHT FINISH ST. ST.	BRIGHT FINISH BRASS	BRIGHT FINISH BRONZE	CLEAR ANODIZED ALUMINUM	
Column Cover I.D.	4 1/2"	CC-C60-4500/S	CC-C60-4500/B	CC-C60-4500/BB	CC-C60-4500/BBZ	CC-C60-4500/AA
	5"	CC-C60-5000/S	CC-C60-5000/B	CC-C60-5000/BB	CC-C60-5000/BBZ	CC-C60-5000/AA
	4 9/16"	CC-C60-5562/S	CC-C60-5562/B	CC-C60-5562/BB	CC-C60-5562/BBZ	CC-C60-5562/AA
	6"	CC-C60-6000/S	CC-C60-6000/B	CC-C60-6000/BB	CC-C60-6000/BBZ	CC-C60-6000/AA
	6 5/8"	CC-C60-6625/S	CC-C60-6625/B	CC-C60-6625/BB	CC-C60-6625/BBZ	CC-C60-6625/AA
	7 5/8"	CC-C60-7625/S	CC-C60-7625/B	CC-C60-7625/BB	CC-C60-7625/BBZ	CC-C60-7625/AA
	8"	CC-C60-8000/S	CC-C60-8000/B	CC-C60-8000/BB	CC-C60-8000/BBZ	CC-C60-8000/AA
	8 5/8"	CC-C60-8625/S	CC-C60-8625/B	CC-C60-8625/BB	CC-C60-8625/BBZ	CC-C60-8625/AA
	9 5/8"	CC-C60-9625/S	CC-C60-9625/B	CC-C60-9625/BB	CC-C60-9625/BBZ	CC-C60-9625/AA
	10 3/4"	CC-C60-1075/S	CC-C60-1075/B	CC-C60-1075/BB	CC-C60-1075/BBZ	CC-C60-1075/AA
	11 3/4"	CC-C60-1175/S	CC-C60-1175/B	CC-C60-1175/BB	CC-C60-1175/BBZ	CC-C60-1175/AA

Standard sizes shown at left.  
 For custom sizes, please provide:

1. Column Diameter
2. Cover Height
3. Material Type
4. Thickness (gauge)
5. Finish

Please note the following:

- Minimum diameter 4" (102mm)
- Maximum length 72" (1829mm)
- Standard thickness for all metals is 24 gauge (.6mm)
- Maximum thickness for stainless steel is 18 gauge (1.2mm)
- Maximum thickness for brass, bronze and aluminum is 14 gauge (2.1mm)

### CC-C Series Clip Lock Column Guard, 72" Long

	SATIN FINISH ST. ST.	BRIGHT FINISH ST. ST.	BRIGHT FINISH BRASS	BRIGHT FINISH BRONZE	CLEAR ANODIZED ALUMINUM	
Column Cover I.D.	4 1/2"	CC-C72-4500/S	CC-C72-4500/B	CC-C72-4500/BB	CC-C72-4500/BBZ	CC-C72-4500/AA
	5"	CC-C72-5000/S	CC-C72-5000/B	CC-C72-5000/BB	CC-C72-5000/BBZ	CC-C72-5000/AA
	4 9/16"	CC-C72-5562/S	CC-C72-5562/B	CC-C72-5562/BB	CC-C72-5562/BBZ	CC-C72-5562/AA
	6"	CC-C72-6000/S	CC-C72-6000/B	CC-C72-6000/BB	CC-C72-6000/BBZ	CC-C72-6000/AA
	6 5/8"	CC-C72-6625/S	CC-C72-6625/B	CC-C72-6625/BB	CC-C72-6625/BBZ	CC-C72-6625/AA
	7 5/8"	CC-C72-7625/S	CC-C72-7625/B	CC-C72-7625/BB	CC-C72-7625/BBZ	CC-C72-7625/AA
	8"	CC-C72-8000/S	CC-C72-8000/B	CC-C72-8000/BB	CC-C72-8000/BBZ	CC-C72-8000/AA
	8 5/8"	CC-C72-8625/S	CC-C72-8625/B	CC-C72-8625/BB	CC-C72-8625/BBZ	CC-C72-8625/AA
	9 5/8"	CC-C72-9625/S	CC-C72-9625/B	CC-C72-9625/BB	CC-C72-9625/BBZ	CC-C72-9625/AA
	10 3/4"	CC-C72-1075/S	CC-C72-1075/B	CC-C72-1075/BB	CC-C72-1075/BBZ	CC-C72-1075/AA
	11 3/4"	CC-C72-1175/S	CC-C72-1175/B	CC-C72-1175/BB	CC-C72-1175/BBZ	CC-C72-1175/AA

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.



TSM Column Guards are guaranteed against defects in workmanship and material for one year from shipping date.



## Suggested Architectural Specification

TSM Model [Fill in Model Number] Clip Lock Column Guard from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876). Construction: One-piece formation with smooth edges. Material: 24 gauge (.6mm), [Stainless steel type 304, satin finish]; [Stainless steel type 304,

bright finish]; [Brass Alloy 260, bright finish]; [Bronze alloy 220, bright finish]; [Aluminum 6061, clear anodized finish]. PVC covered to protect finish during shipping and installation. Diameter: \_\_\_\_\_ (minimum 4"). Height: [62" (1575mm)] [72" (1829mm)].



## Materials

### Column Guard, St. St.

Stainless steel type 304, 24 gauge (.6mm), satin or bright finish. PVC covered to protect finish during shipment and installation. Alternate available: Type 430.

### Column Guard, Brass

Brass alloy 260, 24 gauge (.6mm), bright finish. PVC covered to protect finish during shipment and installation.

### Column Guard, Bronze

Bronze alloy 260, 24 gauge (.6mm), bright finish. PVC covered to protect finish during shipment and installation.

### Column Guard, Aluminum

Aluminum 6061, 24 gauge (.6mm), clear anodized finish. PVC covered to protect finish during shipment and installation.

## Workmanship

### CC-C Clip Lock

Outside clip slides down and locks column guard in place with no screws required.



## Installation

1. Clearance equal to the height of the column guard is needed above the column guard to be able to slide the lock onto the guard.
2. Clean column and apply 3 beads of  $\frac{1}{8}$ " adhesive to the column (3mm).
3. Position guard on column and move guard around slightly to spread adhesive.
4. Slip the lock onto the lips of guard by lowering the clip onto the top of the guard.
5. Remove protective PVC covering.