

# TSM

Since 1966

## Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685  
Phone 800/CALL TSM (800/225-5876) or 310/515-4801  
online www.grabbar.com • Fax 310/217-0653


# SD-5

## Vertical Tank Soap Dispenser

### Liquid, Lotion Soaps and Detergents

### Technical Data

Revised June 2001

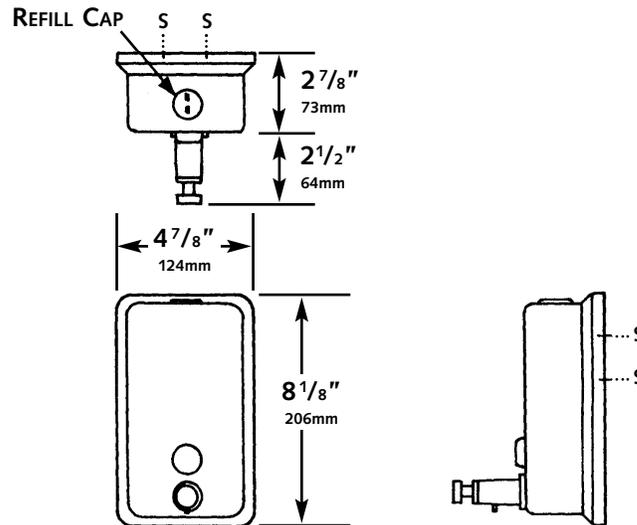

## Suggested Architectural Specification

TSM Model SD-19 Liquid Horizontal Tank Soap Dispenser from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876).

Tank: Stainless steel type 304 (18-8) 20 gauge (0.9mm) satin finish, welded. Plastic refill window to indicate soap level. Mounting: Vandal-resistant with keyed filler top. Valve: Chrome-plated brass body with stainless steel valve mechanism and O-ring seals. Capacity: 40 ounces (1.2 liters).



## Operation

Valve pushes in to dispense liquid soap, lotions and detergents. If necessary, valve may be primed by holding finger over spout during outward stroke until soap flows smoothly. Integral check valve controls soap flow. Refills through vandal-resistant cap when window indicates need.



## Materials/Workmanship

**Dispenser Tank** Stainless steel type 304 (18-8) 20 gauge satin finish (0.9mm). View indicator level is clear plastic.  
**Valve** Chrome-plated brass with stainless steel internal spring and ABS piston with stainless steel push button.



## Installation

1. Unit is surface mounted on wall using screws provided by manufacturer as locations marked by an "S".
2. For plaster or dry wall, provide in-wall backing complying with local building codes.
3. For other surfaces, provide fiber plugs or expansion shields for use with screws provided by manufacturer, or provide toggle bolts or expansion bolts.
4. Mount wallplate in vertical position with wide opening of "V" at the top, allowing 4" upward clearance to access filler top (102mm). Slide dispenser over wallplate until wedge brackets interlock, then lock in place with screw installed through refill cap.
4. Recommended mounting height from finish floor to top of dispenser is 47" or 6" above wash basin (3734-152mm).

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.



## Guarantee

TSM SD-5 Vertical Tank Soap Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.