

#### **Tubular Specialties Manufacturing, Inc.**

13011 South Spring Street, Los Angeles, CA 90061-1685 Phone 800/CALL TSM (800/225-5876) or 310/515-4801 online www.grabbar.com • Fax 310/217-0653



#### Technical Data

Revised July 2001

# **Counter Top Soap Dispenser**



#### **Model Numbers**

□ SD-9

- 34 oz. (1.0L) x 4" Spout (102mm)

□ SD-9L


34 oz. (1.0L) x 6" Spout (152mm)

□ SD-9S

- 20 oz. (.6L) x 4" Spout (102mm)

**9SL** - 20 oz. (.6L) x 6" Spout (152mm)



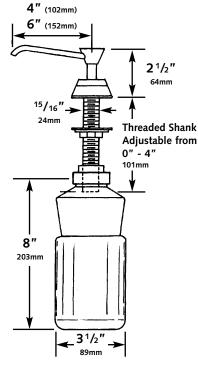



### Suggested Architectural Specification

TSM Model SD-9 All-Purpose Counter Top Soap Dispenser from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876).

Construction: Spout stem and internal mechanism are stainless steel; collar escutcheon and threaded shank are chrome-plated brass. Globe: Polyethylene. Capacity: 32 ounces (.9 liter).



### Operation

Piston pushes down to dispense liquid soap, lotions and detergents. If necessary, valve may be primed by holding finger over spout during upward stroke until soap flows smoothly. Access globe for refilling through top by refill key provided by manufacturer to unlock top half of escutcheon.



## Materials/Workmanship

Push Button, Spout, Piston

All metal parts in contact with soap are constructed of stainless steel; other exposed suraces are chrome-plated brass.

Globe

Translucent white polyethelene. Screws to underside of shank.



### Installation

- Remove globe. Mount dispenser through 1" (25mm) hole in counter top.
- 2. Install shank washer and nut, tightening nut to secure dispenser
- to lavatory; however, do not overtighten.
- 3. Screw globe to shank, leaving a  $^1/_4$ " (6mm) clearance from the tube end to the globe bottom to prevent sediment from clogging the passageway.

