

Tubular Specialties Manufacturing, Inc.


13011 South Spring Street, Los Angeles, CA 90061-1685 Phone 800/CALL TSM (800/225-5876) or 310/515-4801 www.GrabBar.com • Fax 310/217-0653 5140


Technical Data

Revised June 2005

Surface Mounted End Stall Sanitary Napkin Disposal

With Finger Grip

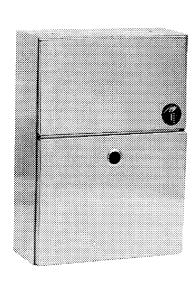

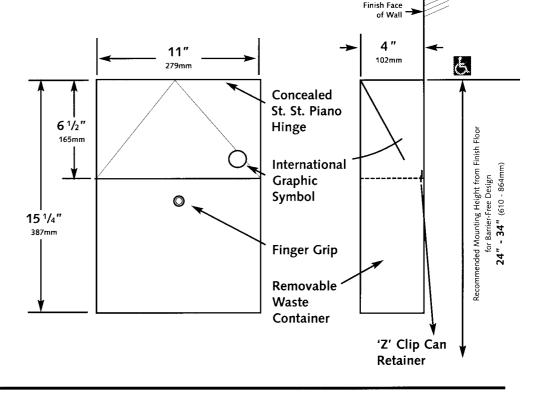



Specification

Surface Mounted End Stall Sanitary Napkin Disposal cabinet shall be stainless steel type 304 (18-8) 22 gauge (0.8mm) satin finish, formed and welded. Capacity shall be 1.5 gallons (5.7L). Push Door shall be attached to cabinet with concealed full-length piano hinge and shall be spring loaded to hold in closed position. Removable waste container shall be captured internally by full-width Z retainer and shall have a safety-edged finger grip.

Surface Mounted End Stall Napkin Disposal shall be Model 5140 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



Operation

User pushes self-closing door to deposit sanitary napkins. Unit empties by removing bottom waste container and inverting over

collection bag. Waste container is captured by internal angle to prevent inadvertent dumping. Safety-edged finger grip provides convenient grip for service.



Installation

- 1. Unit is surface mounted on wall using screws provided by manufacturer.
- 2. The recommended mounting height for barrier-free design is 24" 34" from the top of unit to the finish floor.
- 3. For plaster or dry wall, provide in-wall backing

- complying with local building codes.
- 4. For other surfaces, provide fiber plugs or expansion shields for use with screws provided by manufacturer, or provide toggle bolts or expansion bolts.
- Accessories should be inspected periodically to make sure their attachment to the wall is not loosening.

